


REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	17.05.08	NEW DRAWING	



NOTE

1. Material
Pin: Brass 3604
2. Plating
Pin: 1 micro-inch minimum Au over 50~100 micro-inch nickel
50~100 micro-inch nickel
3. Electrical
Rated current & voltage: DC 36V : 1.0A Max.
Contact resistance: 30 mohm maximum
4. Mechanical
Durability: 10,000 cycles(minimum)
5. To ensure the best usage, please operate it based on the working height
Based on the engineering drawings, shall not exceed the maximum allowed compression
6. To avoid arcing issue, The adaptor start to power supply
after connector mated fully.

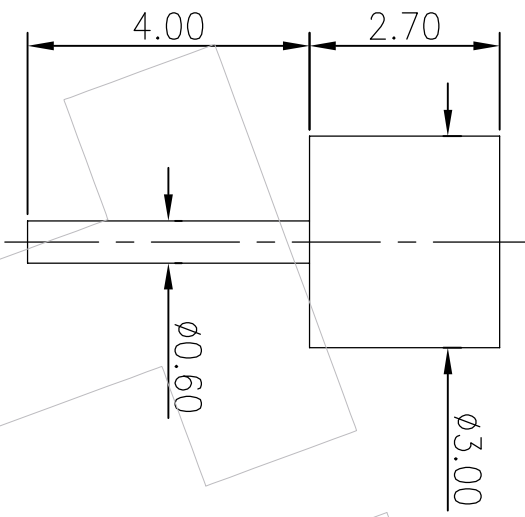

Ordering Information

A 30 670 XX DV X 01

Outer Diameter 30±0.0mm	Total High 670±0.7mm	Contact Plating G0:Gold Flash G1:30U" Gold G2:50U" Gold G3:10U" Gold G4:150U" Gold G5:30U" Gold SK:Gold Flash/In SK:Mate-In	Type DV:180° Dip DR:90° Dip SR:90° 180° SR:SMT	Packing 0=PE Bag A=Tray I=Tube R=Reel	Special
----------------------------	-------------------------	---	--	---	---------



SHENZHEN TSINGRE TECHNOLOGY CO.,LTD

www.tsingre.com

DRAW	David	OPERATION		SCALE	NTS	TITLE: Pogo Pin 180° Dip L=6.7mm			
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING			
CHECK	Jose	X.XX	±0.20	SIZE	A4	PART NO. A30670XXDVX01	DOC PART 001	REVISION A0	
		X.XXX	±0.10						
APPROVE	Hey	Angle	±.3°	THIRD ANGLE PROJECTION		CUSTOMER PART NO.	CUSTOMER	SHEET NUMBER 1 OF 1	
		DIM	TOL						