
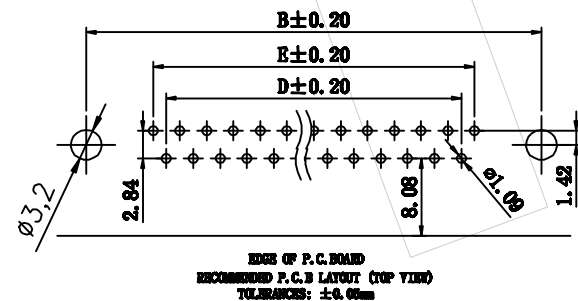
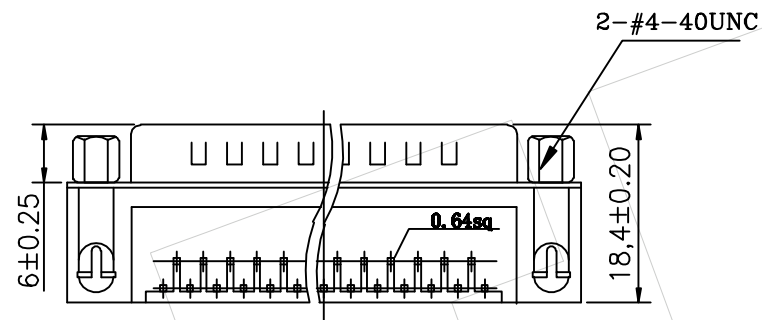
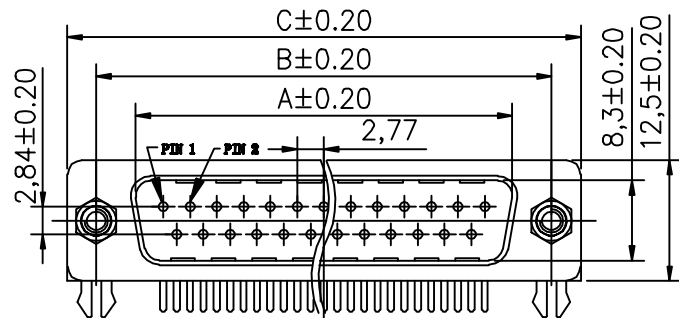


02 Type

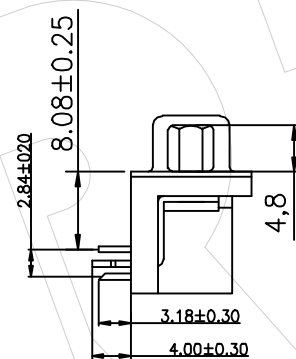

01 Type

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, NICKEL FINISHED
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED, BLACK COLOR
 CONTACT MATERIAL : BRASS
 CONTACT FINISH : SELECTIVE GOLD FLASH
 GROUNDING BRACKET : BRASS MATERIAL, TIN FINISHED
 RIVETED INSERT : BRASS MATERIAL, NICKEL FINISHED
 JACK SCREWS : BRASS MATERIAL, NICKEL FINISHED
 WITH #4-40 THREADED ASSEMBLED

RoHS

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C

Ordering Information

DS-AR	M	XX	XX	B	XX
Connector Type	No. of Pins	Contact	Plating	Color	Type
F=Female M=Male	09,15, 25,37P	S0:Gold G0:Gold	Flash/Tin Flash	B=Black W=White	01=01 Type 02=02 Type

POSITION	A	B	C	D	E
09 (M, P, Q, A)	16.92	25.00	30.8	08.31	11.08
15 (M, P, Q, A)	25.30	33.30	39.3	16.62	19.39
25 (M, P, Q, A)	39.00	47.10	53.2	30.47	33.24
37 (M, P, Q, A)	55.40	63.50	69.4	47.09	49.86

TringRe
 www.tsingre.com

SHENZHEN TSINGRE TECHNOLOGY CO.,LTD

DRAW	David	OPERATION	SCALE	NTS	TITLE: D-sub connector 9P/15P/25P/37P Male R/A			
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING		
CHECK	Anna	X.XX	±0.20	SIZE	A4	PART NO.	DOC PART	REVISION
		X.XXX	±0.10			DS-ARMXXXXBXX	001	A0
APPROVE	Hey	Angle	±3°	THIRD ANGLE PROJECTION		CUSTOMER PART NO.	CUSTOMER	SHEET NUMBER
		DIM	TOL					1 OF 1