

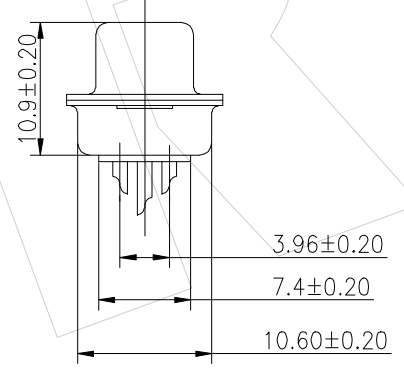


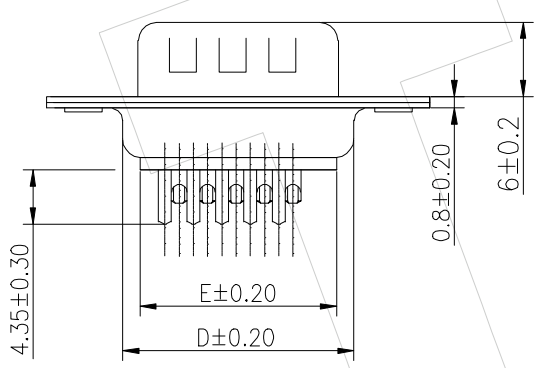

POS.	A	B	C	D	E
15	30.99	24.99	17.92	19.00	15.60
26	39.20	33.32	26.38	27.70	24.90
44	53.05	47.04	39.94	41.10	38.20
62	70.50	62.5	56.43	54.80	54.30

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018/4/27	NEW DRAWING	

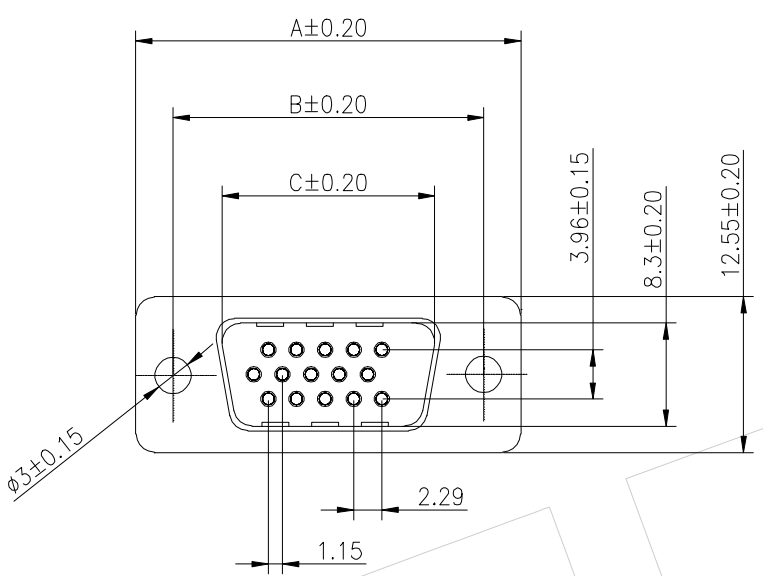

NOTES:
INSULATION RESESTANCE(MIN.):1000MOHMS
CURRENT RATING(MAX.): 3amp AC/DC
WITHSTANDING VOLTAGE:1000VAC
CONTACT RESISTANCE(MAX.)30m chms
OPERATION TEMPERATURE:-55°~+105°
MATERIAL:
CONTACT: PHOSPHOR BRONZE
INSULATION:PBT+30%GLASS FIBER.UL 94V-0
SHELL;STEEL

Ordering Information

DS-BS M XX XX X 01

Connector Type
F=Female
M=Male

No.of Pins
15,26,
44,62P

Contact Plating
S0:Gold Flash/Tin
G0:Gold Flash

Color
B=Black
W=White
U=Blue

SHENZHEN TSINGRE TECHNOLOGY CO.,LTD
www.tsingre.com

DRAW	David	OPERATION		SCALE	NTS	TITLE: HD-SUB Connector Solder Type Male 15P/26P/44P/62P		
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING		
CHECK	Anna	X.XX	±0.20	SIZE	A4	PART NO. DS-BSMXXXXX01	DOC PART 001	REVISION A0
		X.XXX	±0.10					
APPROVE	Hey	Angle	±3°	THRD ANGLE PROJECTION 	CUSTOMER PART NO.	CUSTOMER	SHEET NUMBER 1 OF 1	
		DIM	TOL					