


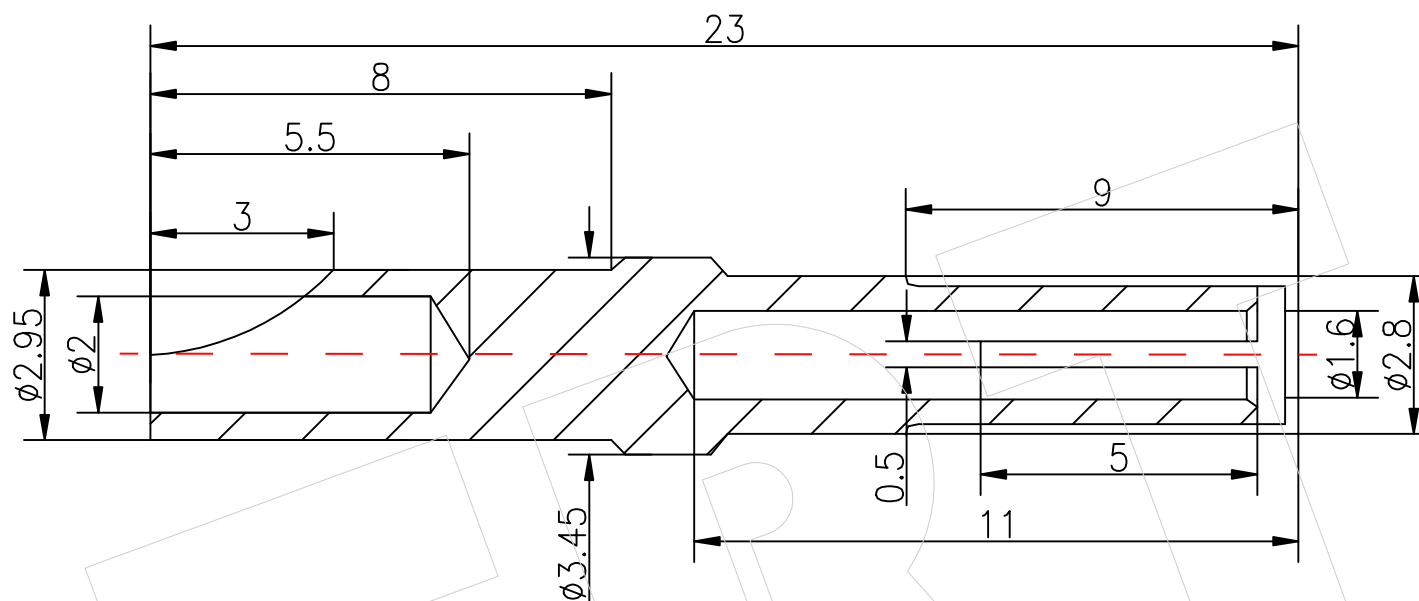

Ordering Information

C F 29 230 XX S X 01

F=Female
M=Male

29=2.95mm

Pin Length
230=23.0

Contact Plating
G0:Gold Flash
G1:30U" Gold
G2:50U" Gold
G3:100U" Gold
G4:150U" Gold
G5:300U" Gold
SN:Gold Flash/Tin
SM:Matte-Tin

Type
DV:180° Dip
DR:90° Dip

Packing
O=PE Bag
A=Tray
T=Tube
R=Reel

Special

Material
Pin : Brass,
Plating : gold or Tin plating etc

TringRe www.tsingre.com				SHENZHEN TSINGRE TECHNOLOGY CO.,LTD					
DRAW	David	OPERATION		SCALE	NTS	TITLE: Φ2.95x23.0 Crown Spring Pin			
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING			
CHECK	Anna	X.XX	±0.20	SIZE	A4	PART NO.	DOC PART	REVISION	
		X.XXX	±0.10			CF29230XXSX01	001	A0	
APPROVE	Hey	Angle	±3°	THRD ANGLE PROJECTION 		CUSTOMER PART NO.	CUSTOMER	SHEET NUMBER	
		DIM	TOL					1 OF 1	