


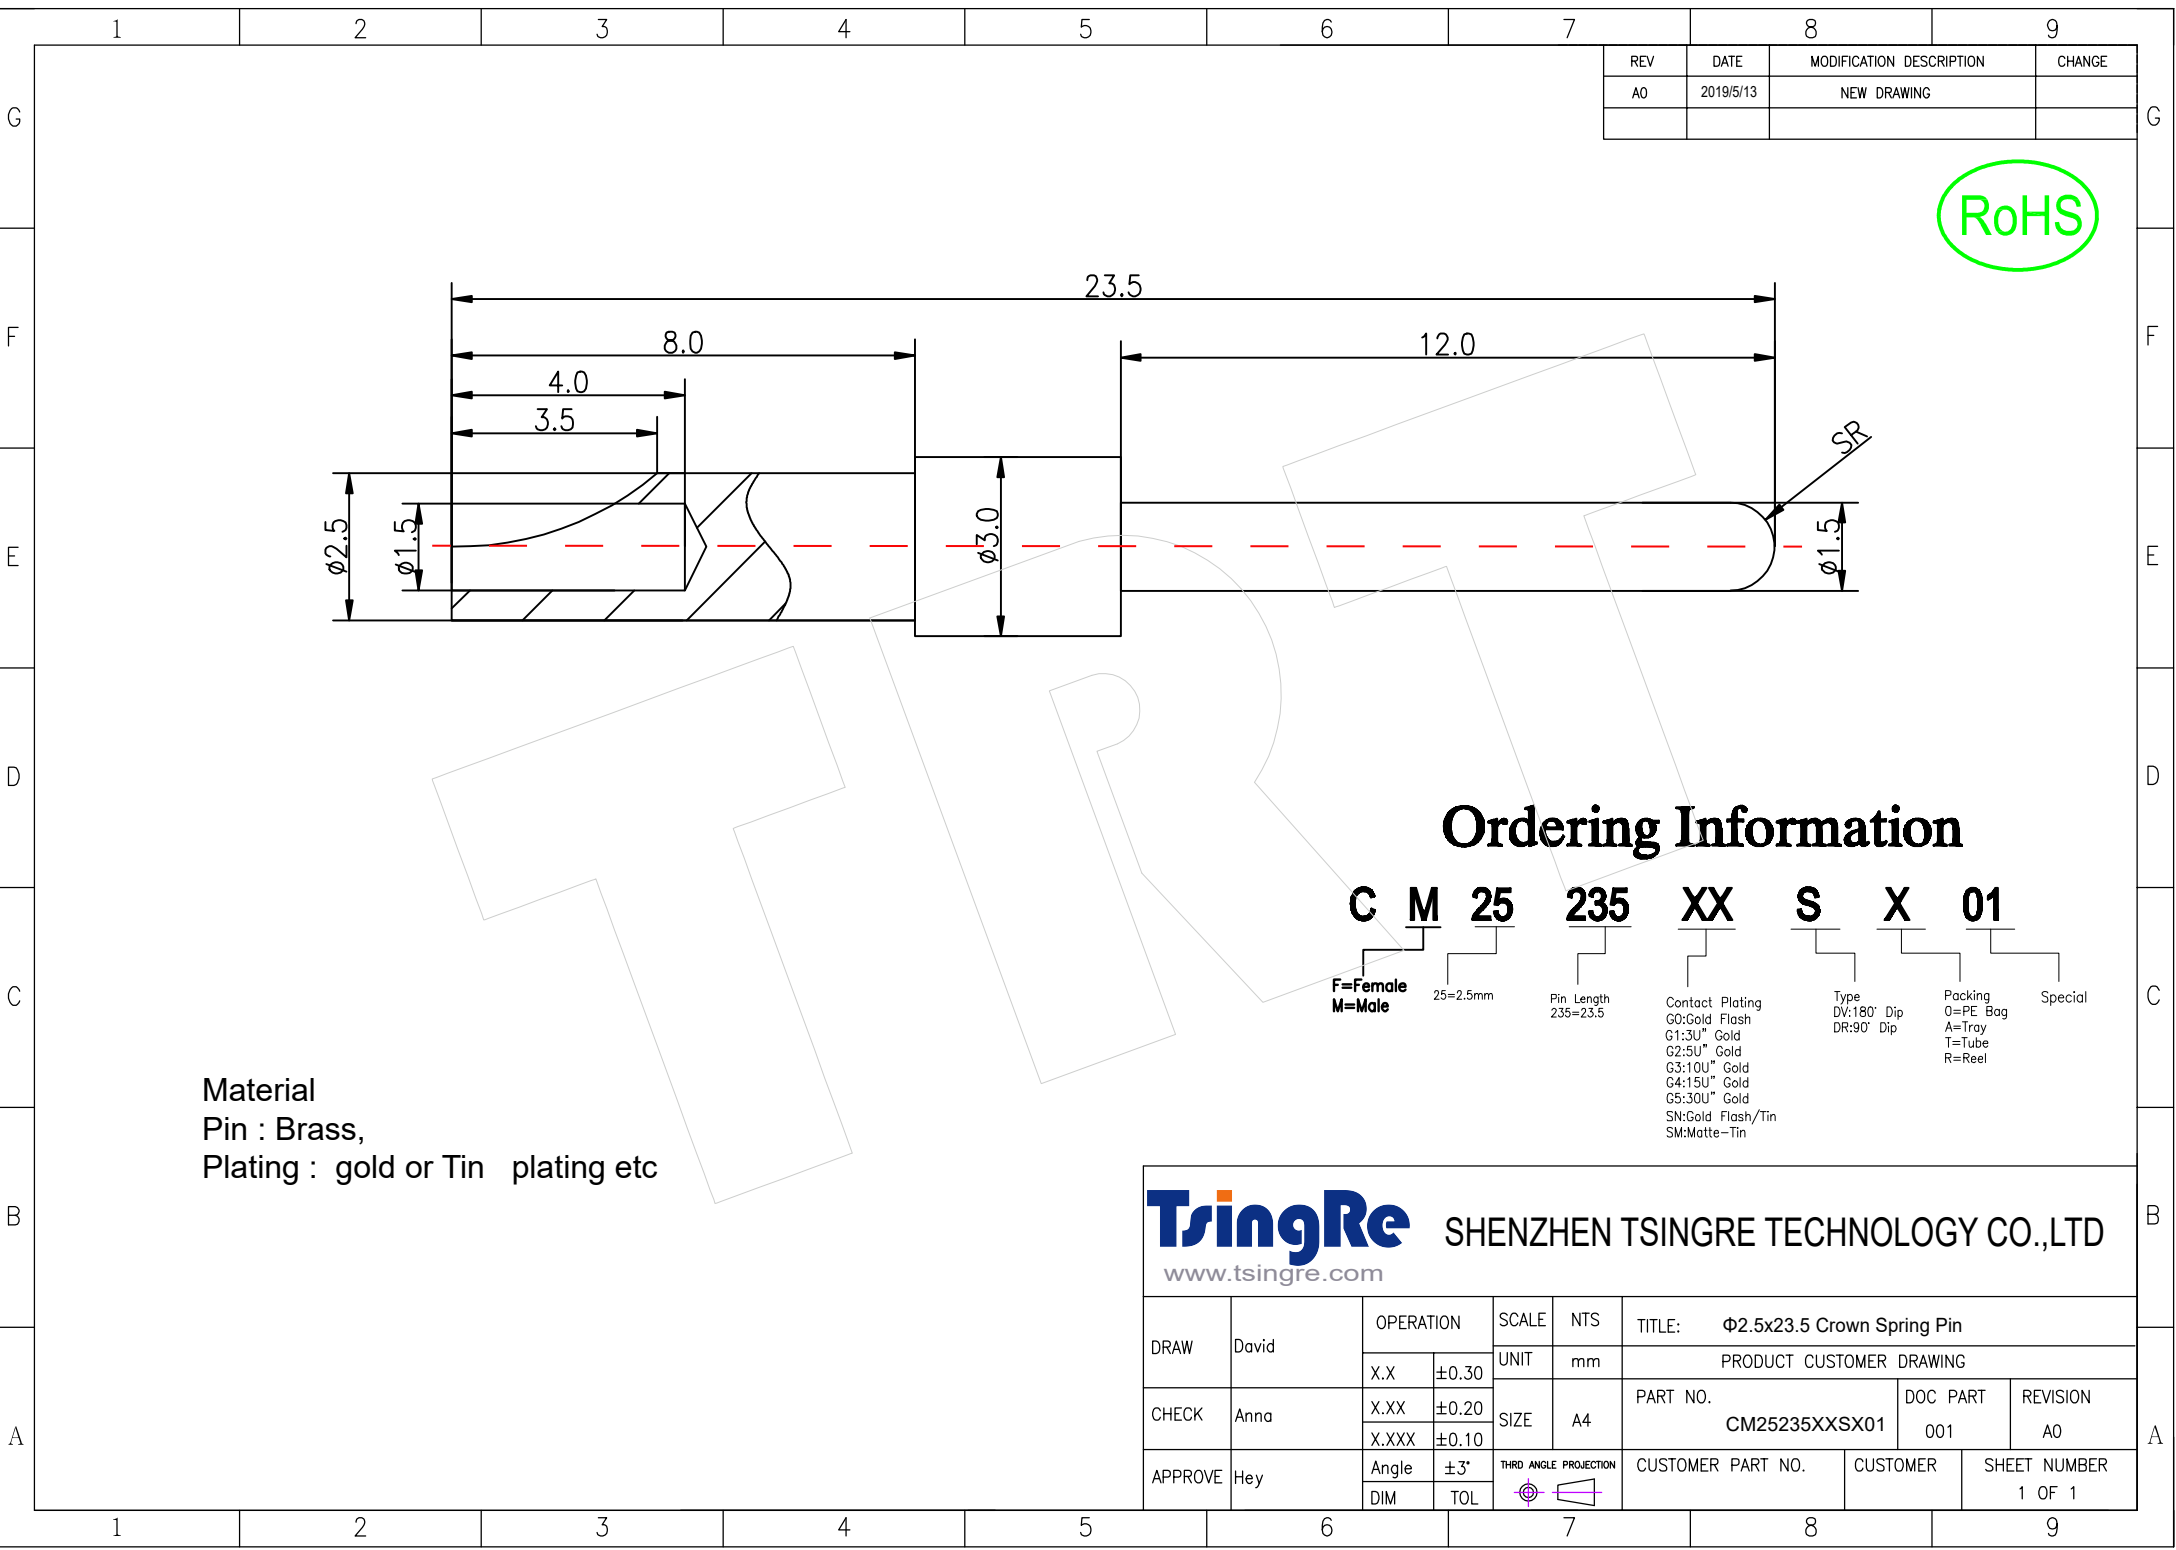

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019/5/13	NEW DRAWING	

RoHS

Material
Pin : Brass,
Plating : gold or Tin plating etc

Ordering Information

C

M

25

235

XX

S

X

01

F=Female
M=Male

25=2.5mm

Pin Length
235=23.5

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
SN:Gold Flash/Tin
SM:Matte-Tin

Type
DV:180° Dip
DR:90° Dip

Packing
Q=PE Bag
A=Tray
T=Tube
R=Reel

Special

TringRe

www.tsingre.com

SHENZHEN TSINGRE TECHNOLOGY CO.,LTD

DRAW	David	OPERATION		SCALE	NTS	TITLE: Φ2.5x23.5 Crown Spring Pin		
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING		
CHECK	Anna	X.XX	±0.20	SIZE	A4	PART NO. CM25235XXSX01	DOC PART 001	REVISION A0
		X.XXX	±0.10					
APPROVE	Hey	Angle	±3'	THRD ANGLE PROJECTION		CUSTOMER PART NO.	CUSTOMER	SHEET NUMBER 1 OF 1
		DIM	TOL					