


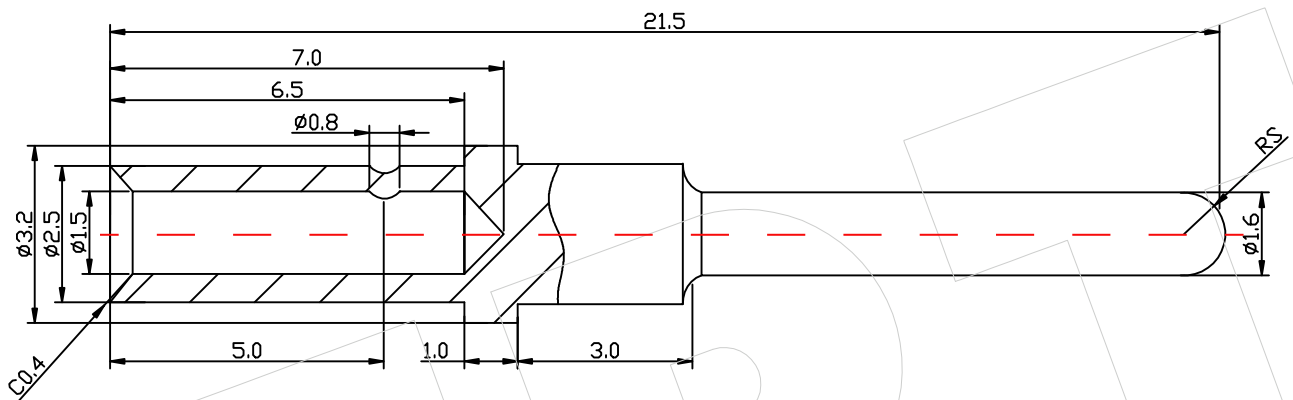

Ordering Information

C M 32 215 XX S X 01

F=Female
M=Male

32=3.2mm

Pin Length
215=21.5mm

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
SN:Gold Flash/Tin
SM:Matte-Tin

Type
DV:180° Dip
DR:90° Dip

Packing
O=PE Bag
A=Tray
T=Tube
R=Reel

Special

Material
Pin : Brass,
Plating : gold or Tin plating etc

TringRe
www.tsingre.com

SHENZHEN TSINGRE TECHNOLOGY CO.,LTD

DRAW	David	OPERATION		SCALE	NTS	TITLE: Φ3.2x21.5 Crown Spring Pin				
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING				
CHECK	Anna	X.XX	±0.20	SIZE	A4	PART NO.		DOC PART	REVISION	
		X.XXX	±0.10			CM32215XXSX01		001	A0	
APPROVE	Hey	Angle	±3°	THIRD ANGLE PROJECTION		CUSTOMER PART NO.		CUSTOMER	SHEET NUMBER	
		DIM	TOL						1 OF 1	