


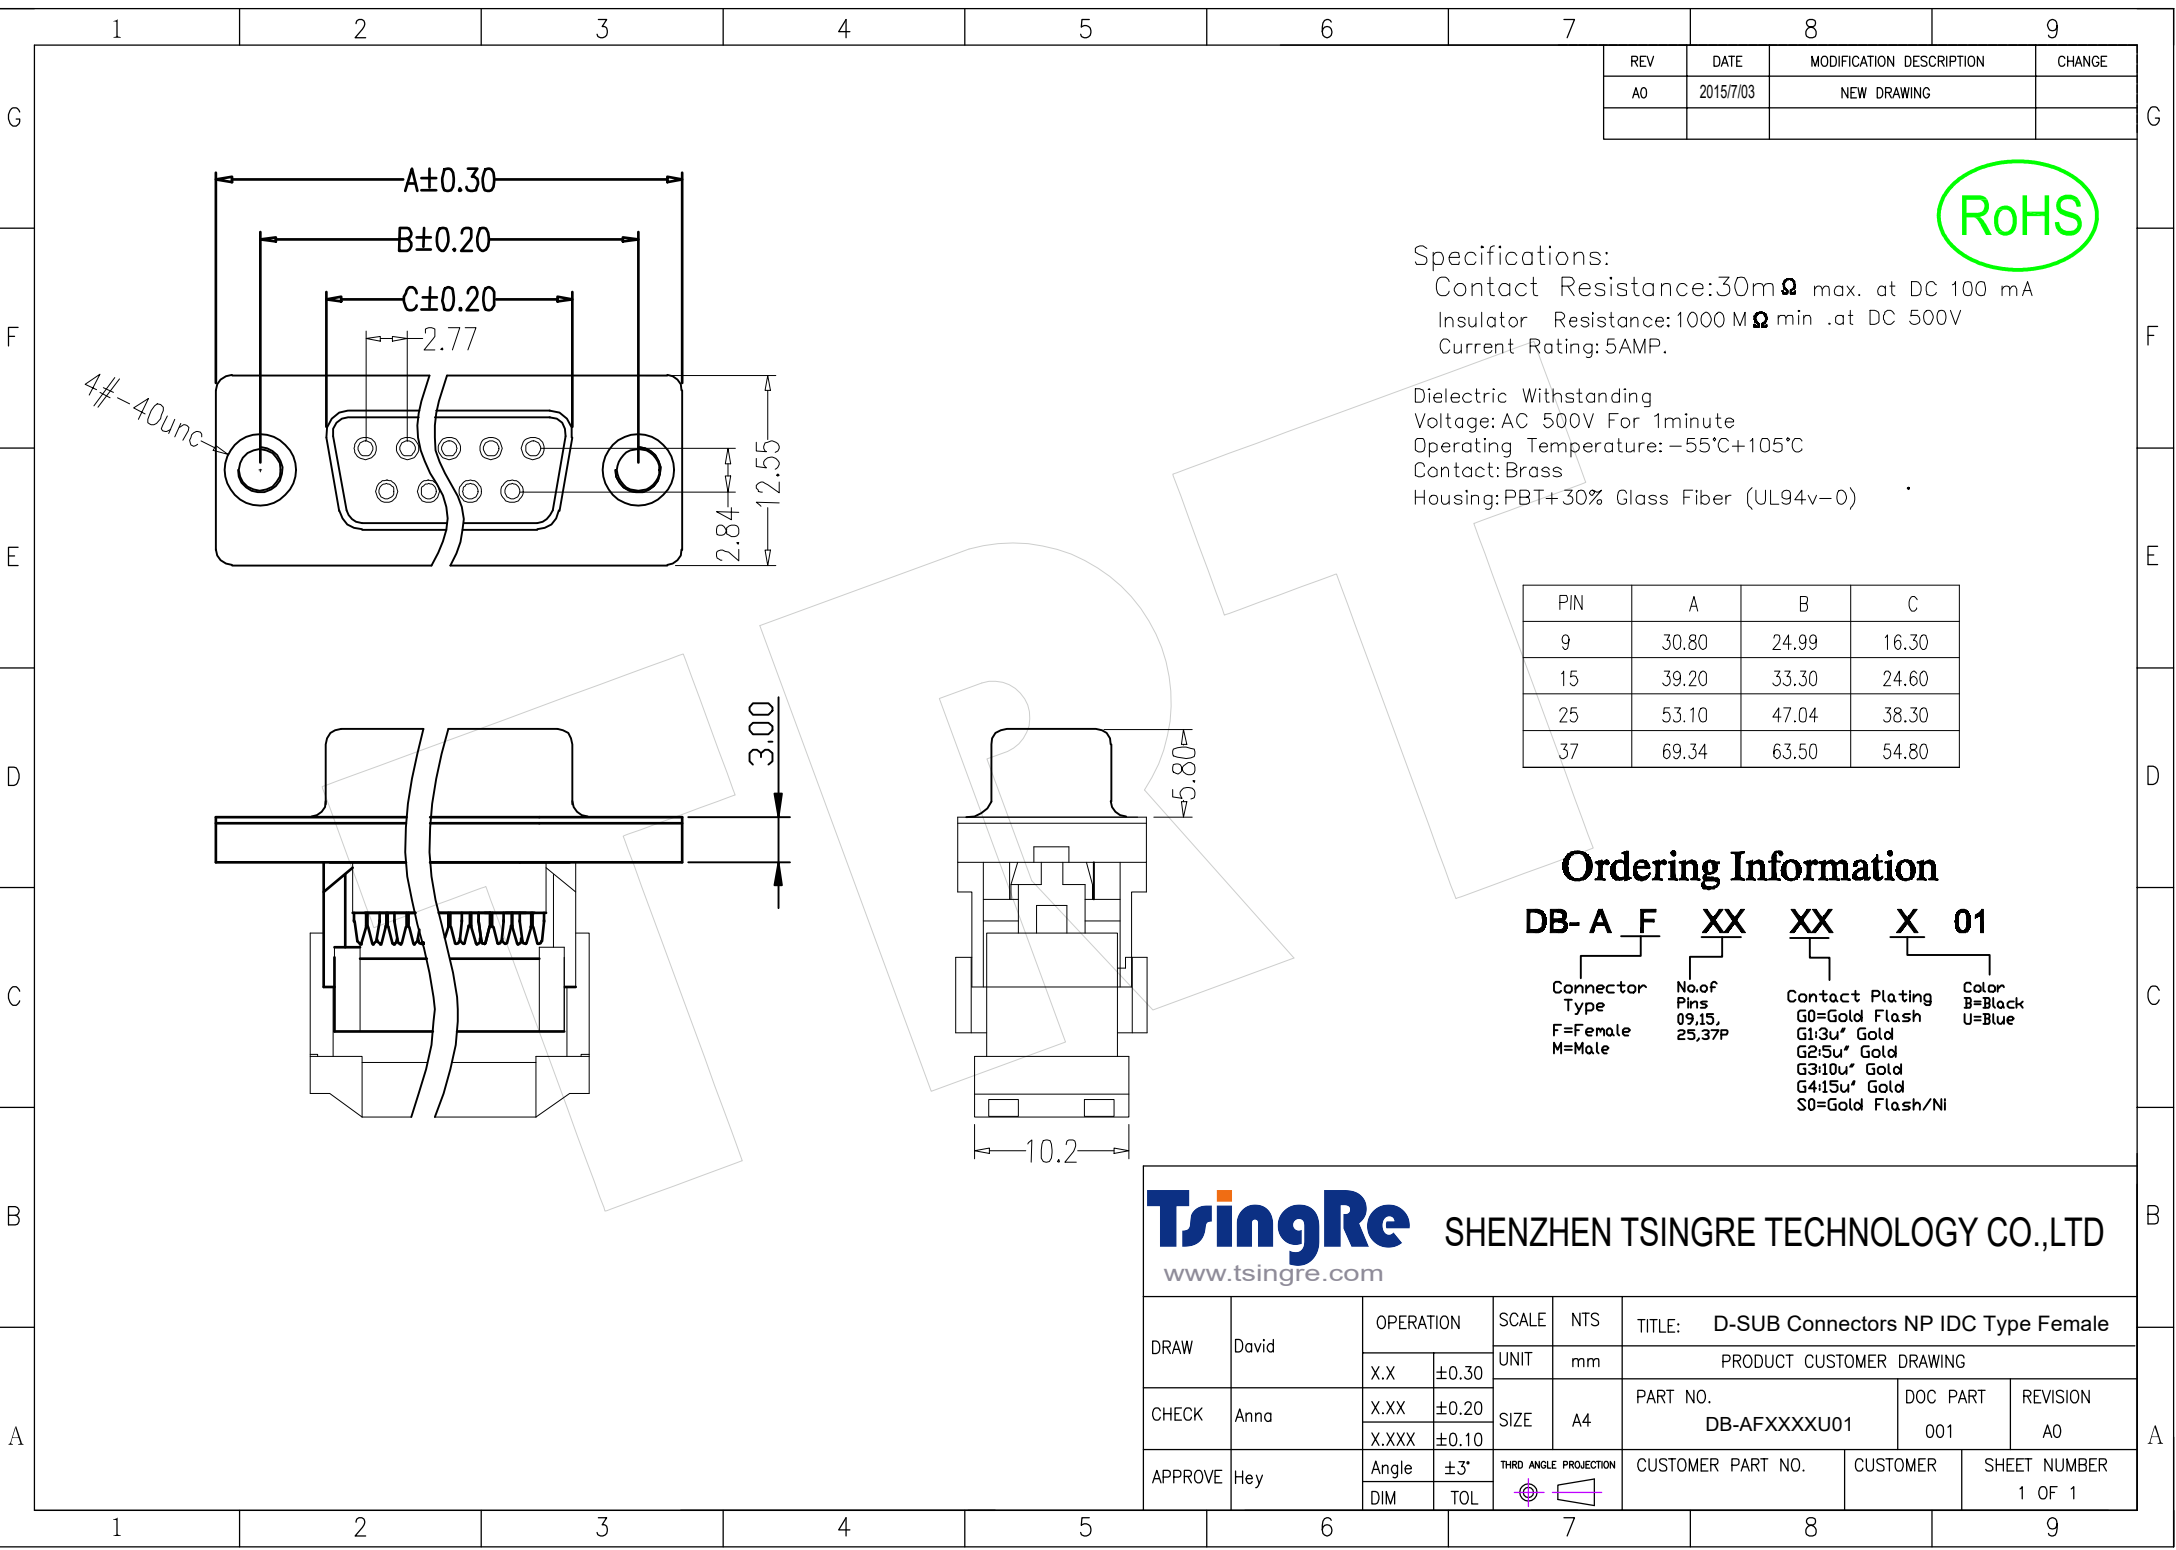

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2015/7/03	NEW DRAWING	

Specifications:
Contact Resistance:30mΩ max. at DC 100 mA
Insulator Resistance:1000 MΩ min .at DC 500V
Current Rating: 5AMP.

Dielectric Withstanding
Voltage: AC 500V For 1minute
Operating Temperature: -55°C+105°C
Contact: Brass
Housing: PBT+30% Glass Fiber (UL94v-0)

PIN	A	B	C
9	30.80	24.99	16.30
15	39.20	33.30	24.60
25	53.10	47.04	38.30
37	69.34	63.50	54.80

Ordering Information

DB- A F XX XX X 01
Connector Type
F=Female
M=Male
No.of Pins
09,15,
25,37P
Contact Plating
G0=Gold Flash
G1:3u" Gold
G2:5u" Gold
G3:10u" Gold
G4:15u" Gold
S0=Gold Flash/Ni
Color
B=Black
U=Blue

TringRe
www.tsingre.com

SHENZHEN TSINGRE TECHNOLOGY CO.,LTD

DRAW	David	OPERATION		SCALE	NTS	TITLE: D-SUB Connectors NP IDC Type Female				
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING				
CHECK	Anna	X.XX	±0.20	SIZE	A4	PART NO.		DOC PART	REVISION	
		X.XXX	±0.10			DB-AFXXXXU01		001	A0	
APPROVE	Hey	Angle	±3°	THRD ANGLE PROJECTION 		CUSTOMER PART NO.		CUSTOMER	SHEET NUMBER	
		DIM	TOL						1 OF 1	