




REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018.5.22	NEW DRAWING	

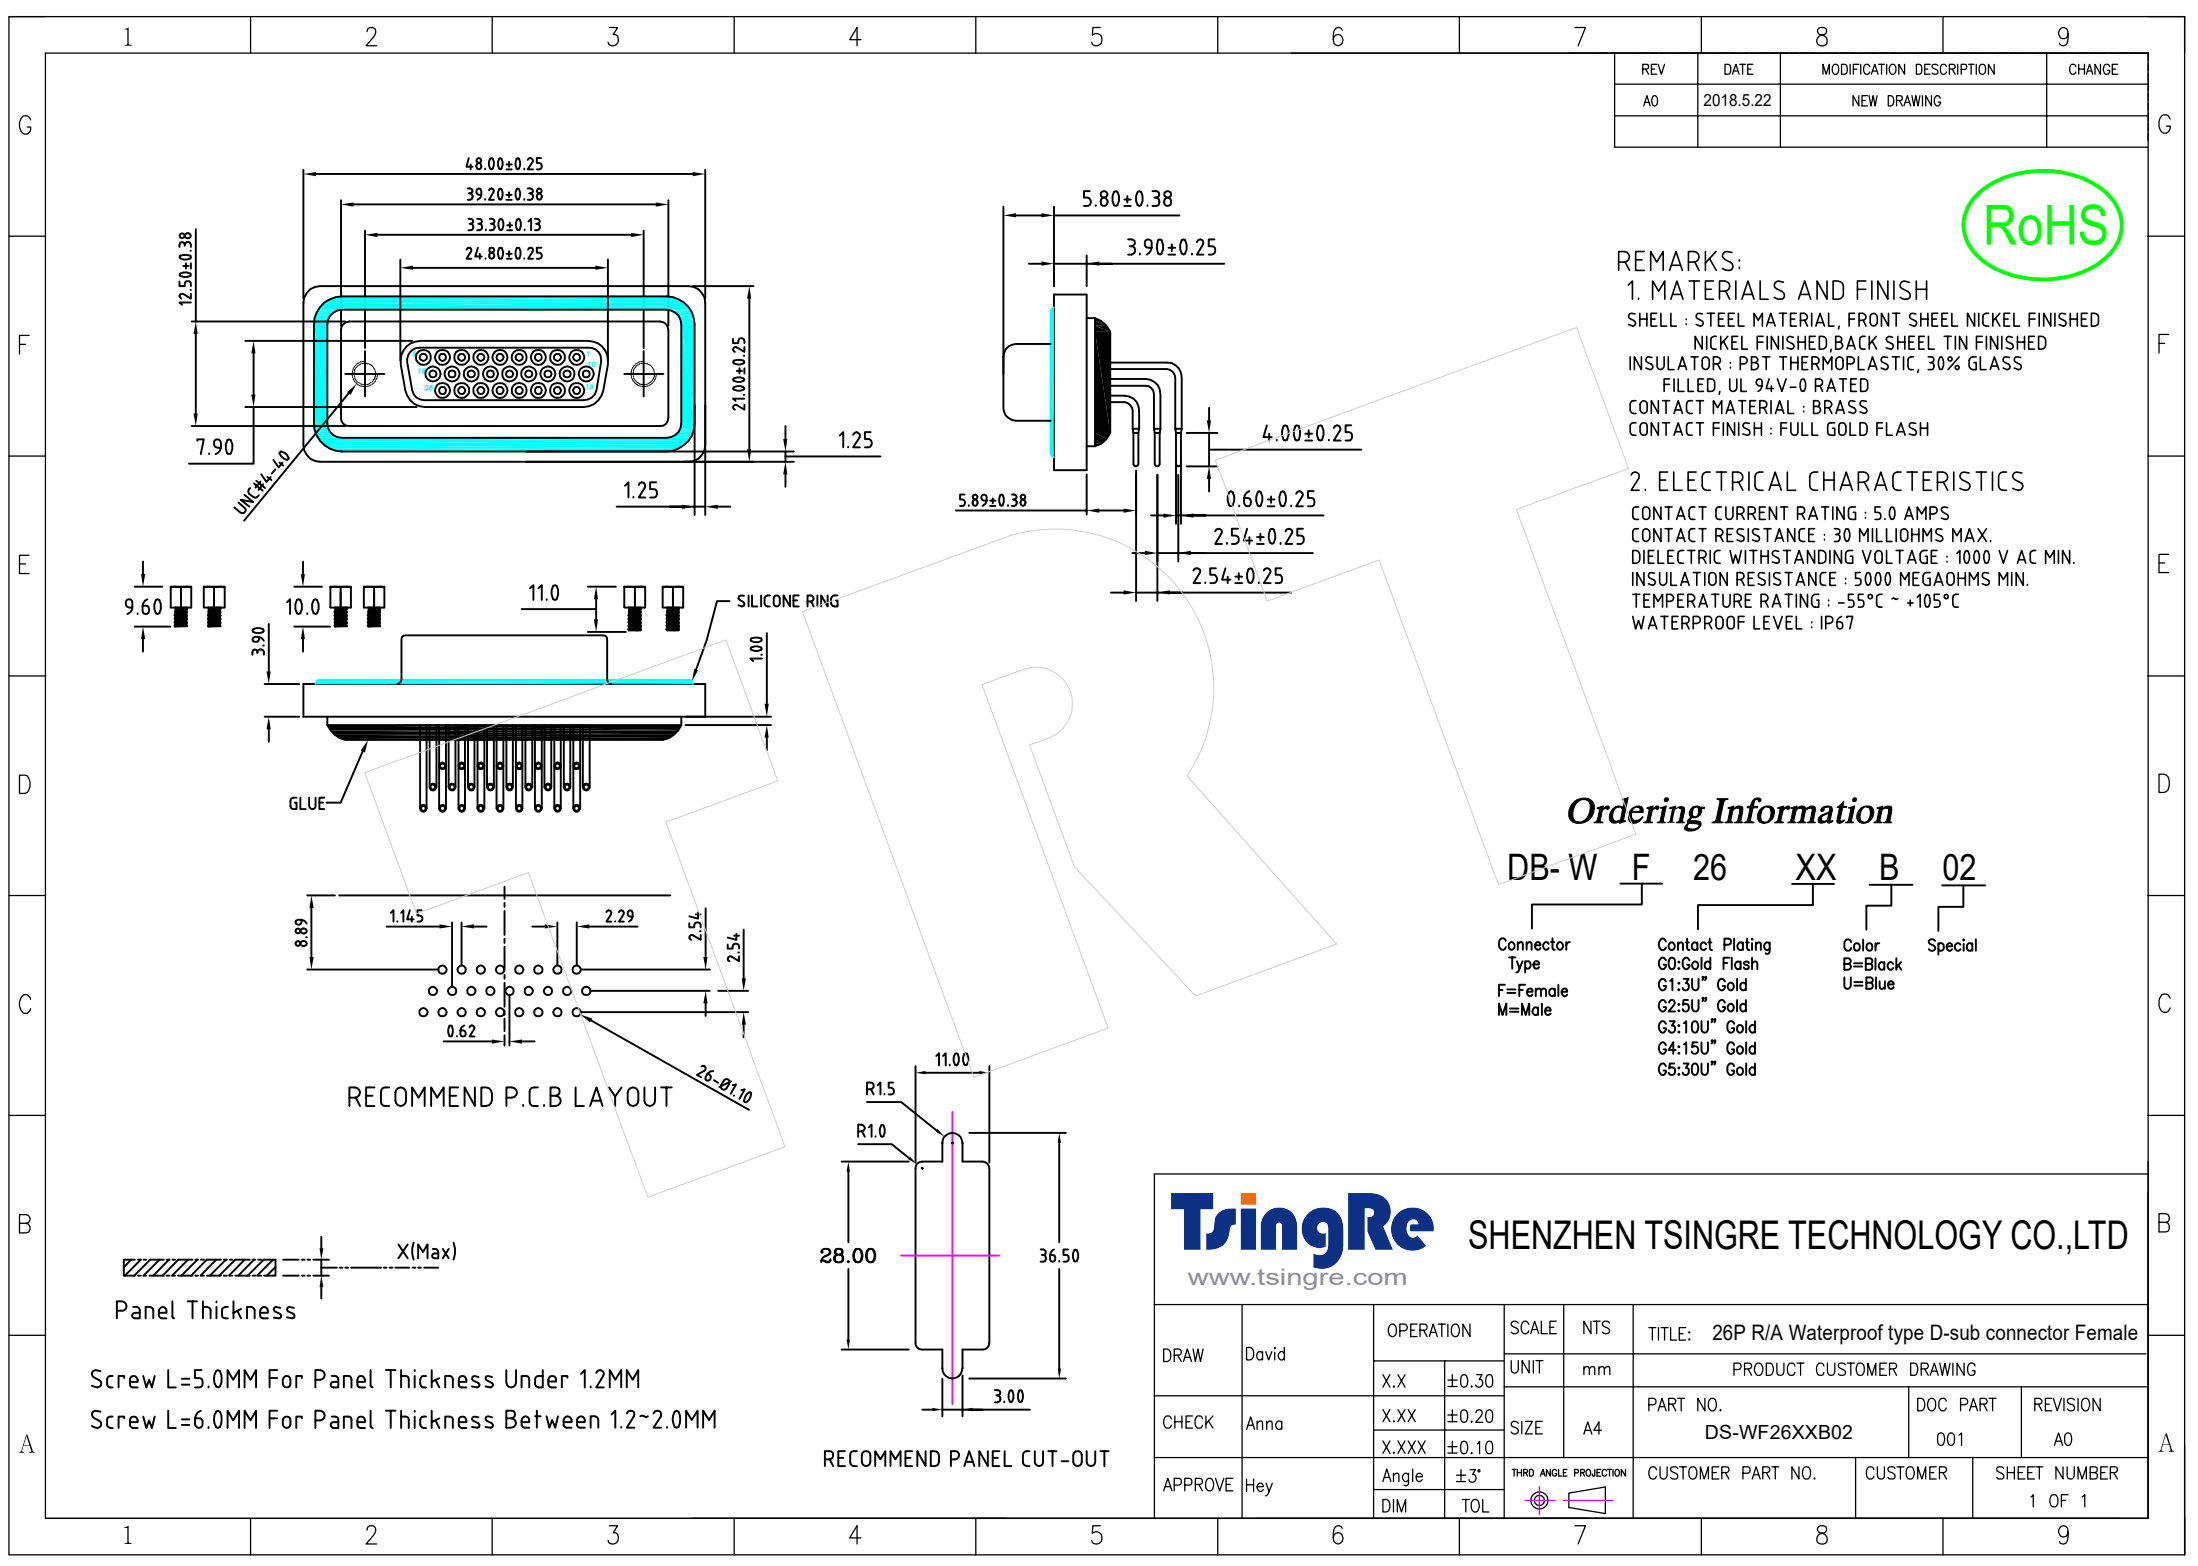

REMARKS:
1. MATERIALS AND FINISH
SHELL : STEEL MATERIAL, FRONT SHEEL NICKEL FINISHED
NICKEL FINISHED, BACK SHEEL TIN FINISHED
INSULATOR : PBT THERMOPLASTIC, 30% GLASS
FILLED, UL 94V-0 RATED
CONTACT MATERIAL : BRASS
CONTACT FINISH : FULL GOLD FLASH

2. ELECTRICAL CHARACTERISTICS
CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +105°C
WATERPROOF LEVEL : IP67

Ordering Information

DB-W	F	26	XX	B	02
Connector Type	Contact Plating	Color	Special		
F=Female M=Male	G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold	B=Black U=Blue			

 SHENZHEN TSINGRE TECHNOLOGY CO.,LTD										
www.tsingre.com										
DRAW	David	OPERATION		SCALE	NTS	TITLE: 26P R/A Waterproof type D-sub connector Female				
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING				
CHECK	Anna	X.XX	±0.20	SIZE	A4	PART NO. DS-WF26XXB02		DOC PART	REVISION	
		X.XXX	±0.10					001	A0	
APPROVE	Hey	Angle	±3°	THIRD ANGLE PROJECTION 		CUSTOMER PART NO.		CUSTOMER	SHEET NUMBER 1 OF 1	
		DIM	TOL							