



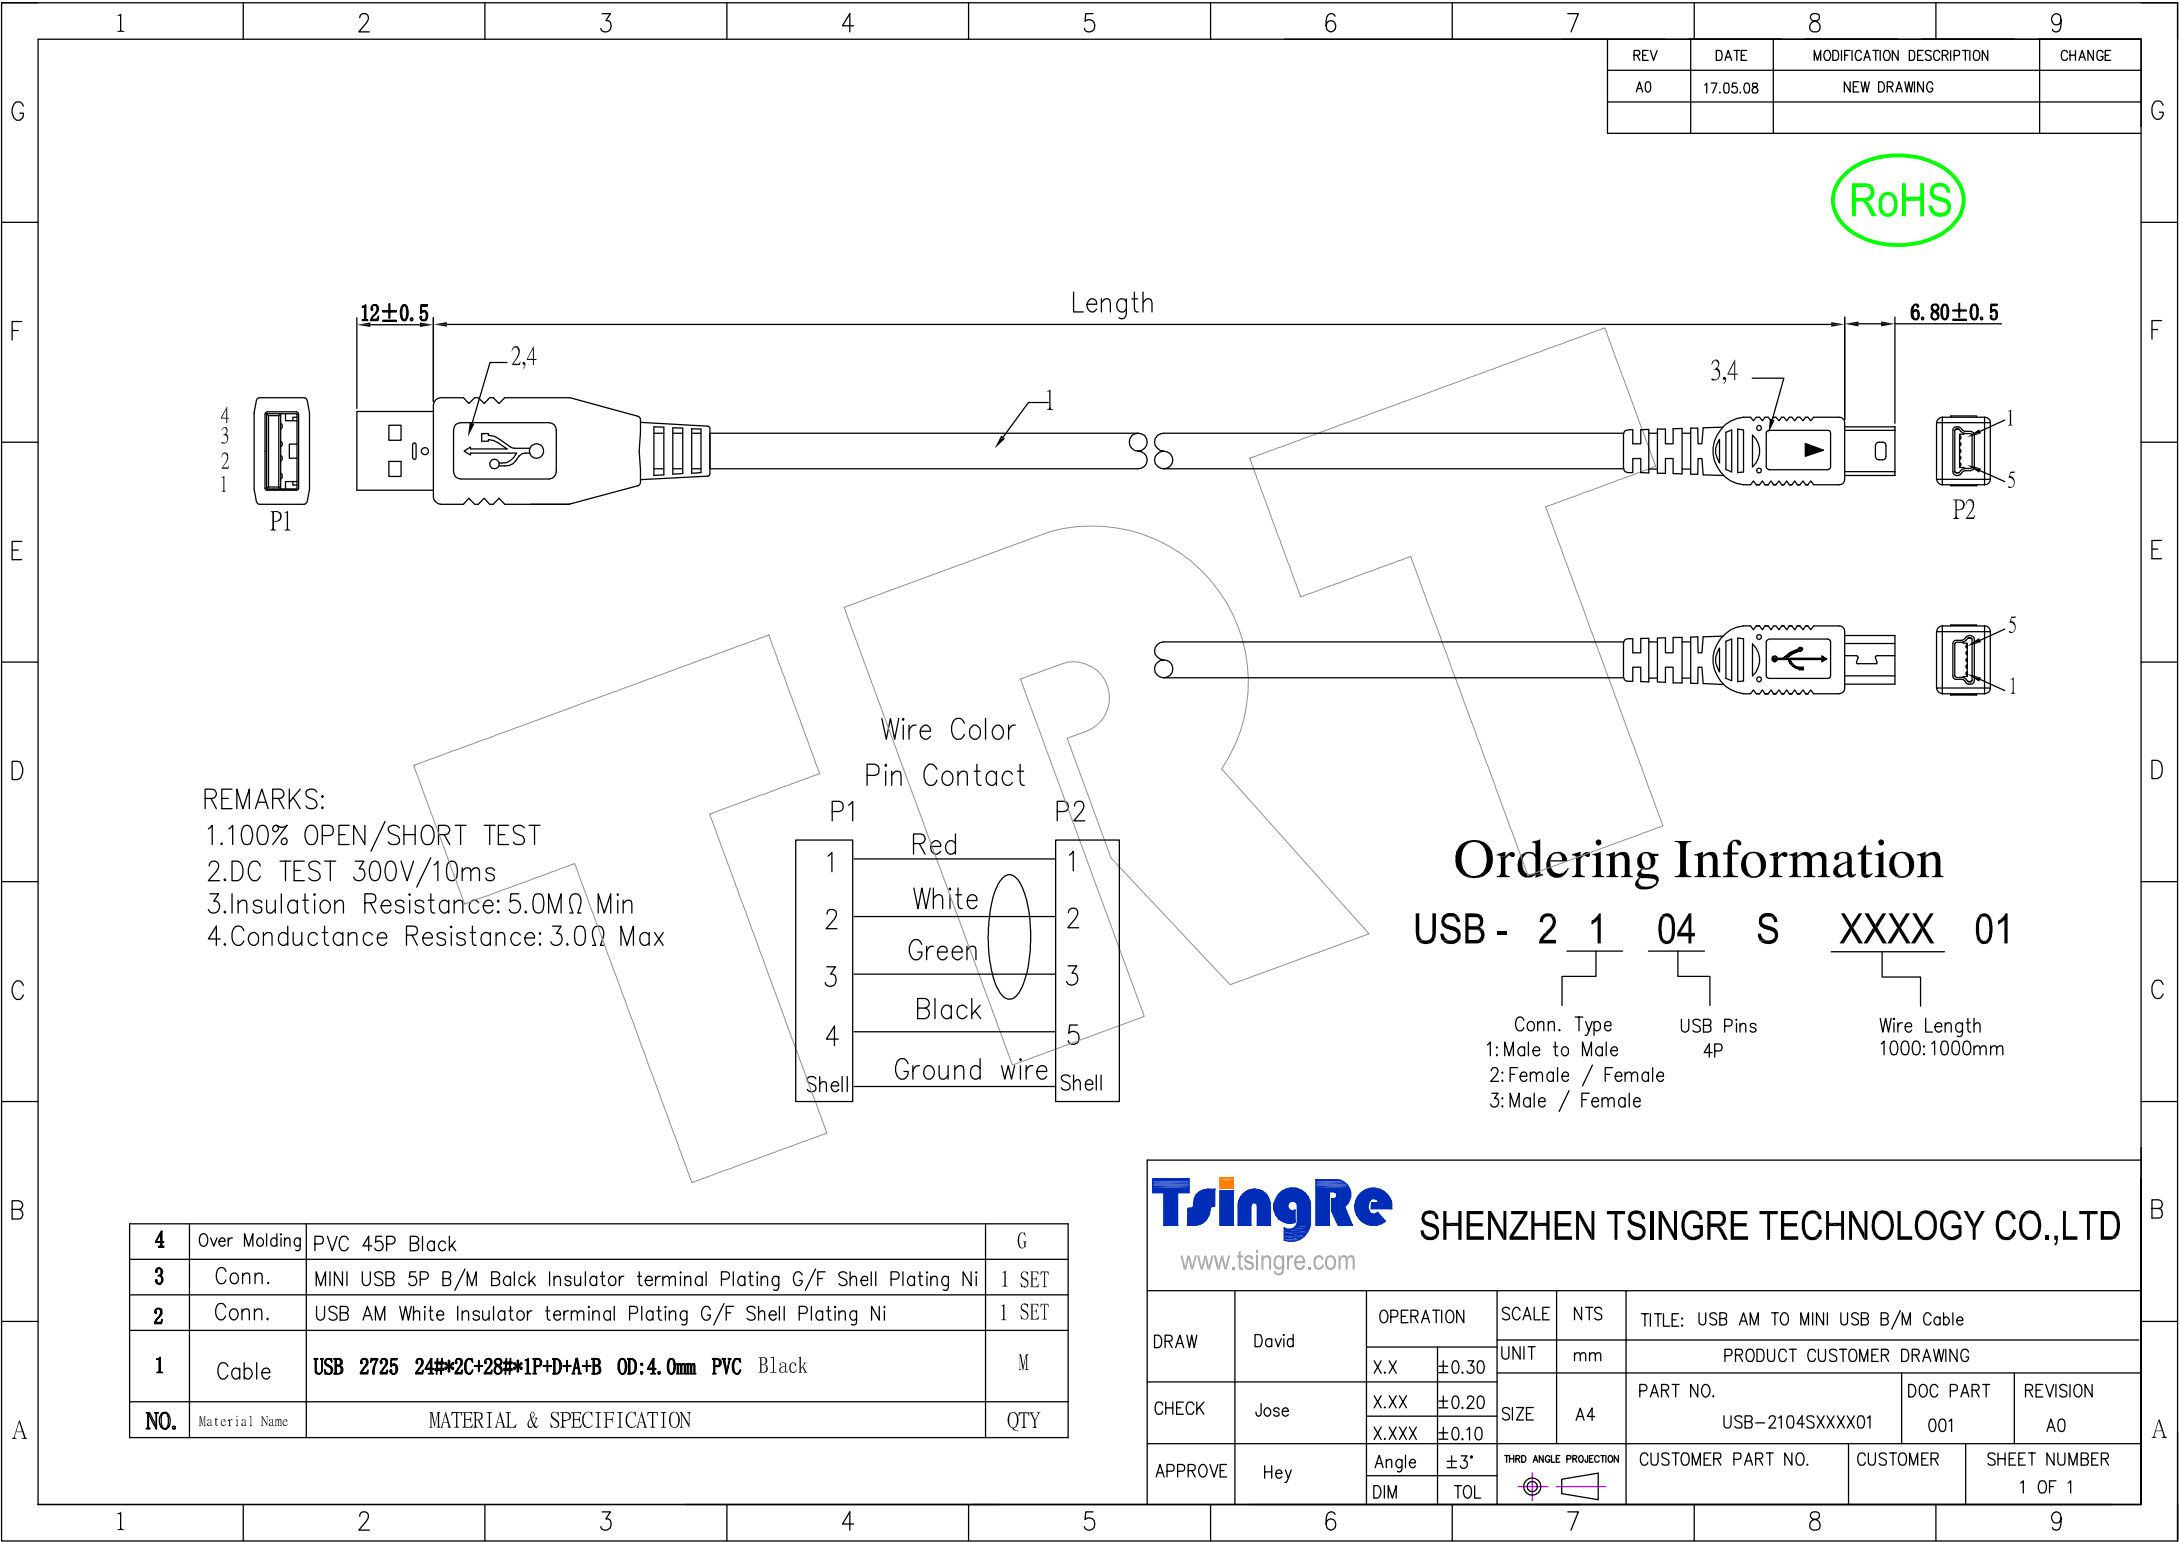

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	17.05.08	NEW DRAWING	

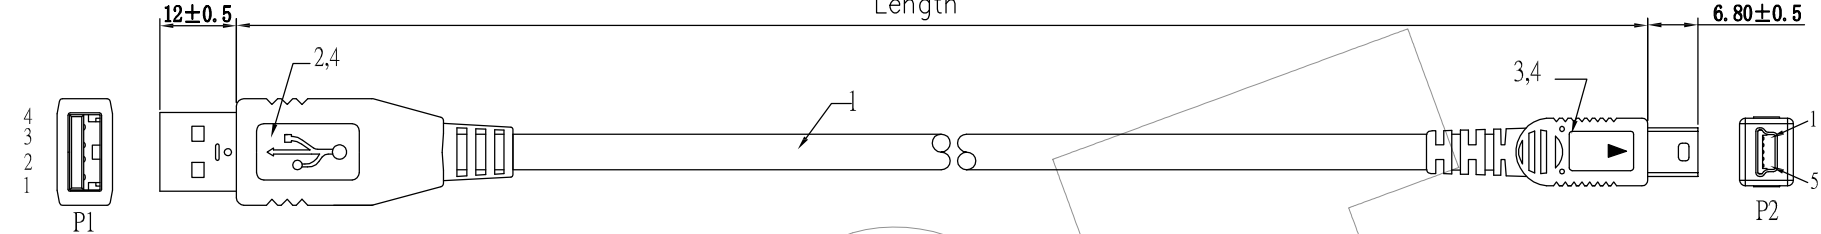

REMARKS:
1.100% OPEN/SHORT TEST
2.DC TEST 300V/10ms
3.Insulation Resistance:5.0MΩ Min
4.Conductance Resistance:3.0Ω Max

Wire Color		Pin Contact	
P1		P2	
1	Red	1	
2	White	2	
3	Green	3	
4	Black	5	
Shell	Ground wire	Shell	


Ordering Information
USB - 2 1 04 S XXXX 01
Conn. Type 1:Male to Male 2:Female / Female 3:Male / Female
USB Pins 4P
Wire Length 1000:1000mm

4	Over Molding	PVC 45P Black	G
3	Conn.	MINI USB 5P B/M Balck Insulator terminal Plating G/F Shell Plating Ni	1 SET
2	Conn.	USB AM White Insulator terminal Plating G/F Shell Plating Ni	1 SET
1	Cable	USB 2725 24##*2C+28##*1P+D+A+B OD:4.0mm PVC Black	M
NO.	Material Name	MATERIAL & SPECIFICATION	QTY



SHENZHEN TSINGRE TECHNOLOGY CO.,LTD

www.tsingre.com

DRAW	David	OPERATION		SCALE	NTS	TITLE: USB AM TO MINI USB B/M Cable			
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING			
CHECK	Jose	X.XX	±0.20	SIZE	A4	PART NO.		DOC PART	REVISION
		X.XXX	±0.10			USB-2104SXXXX01		001	A0
APPROVE	Hey	Angle	±3°	THRD ANGLE PROJECTION		CUSTOMER PART NO.		CUSTOMER	SHEET NUMBER
		DIM	TOL						1 OF 1