




REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	17.05.08	NEW DRAWING	

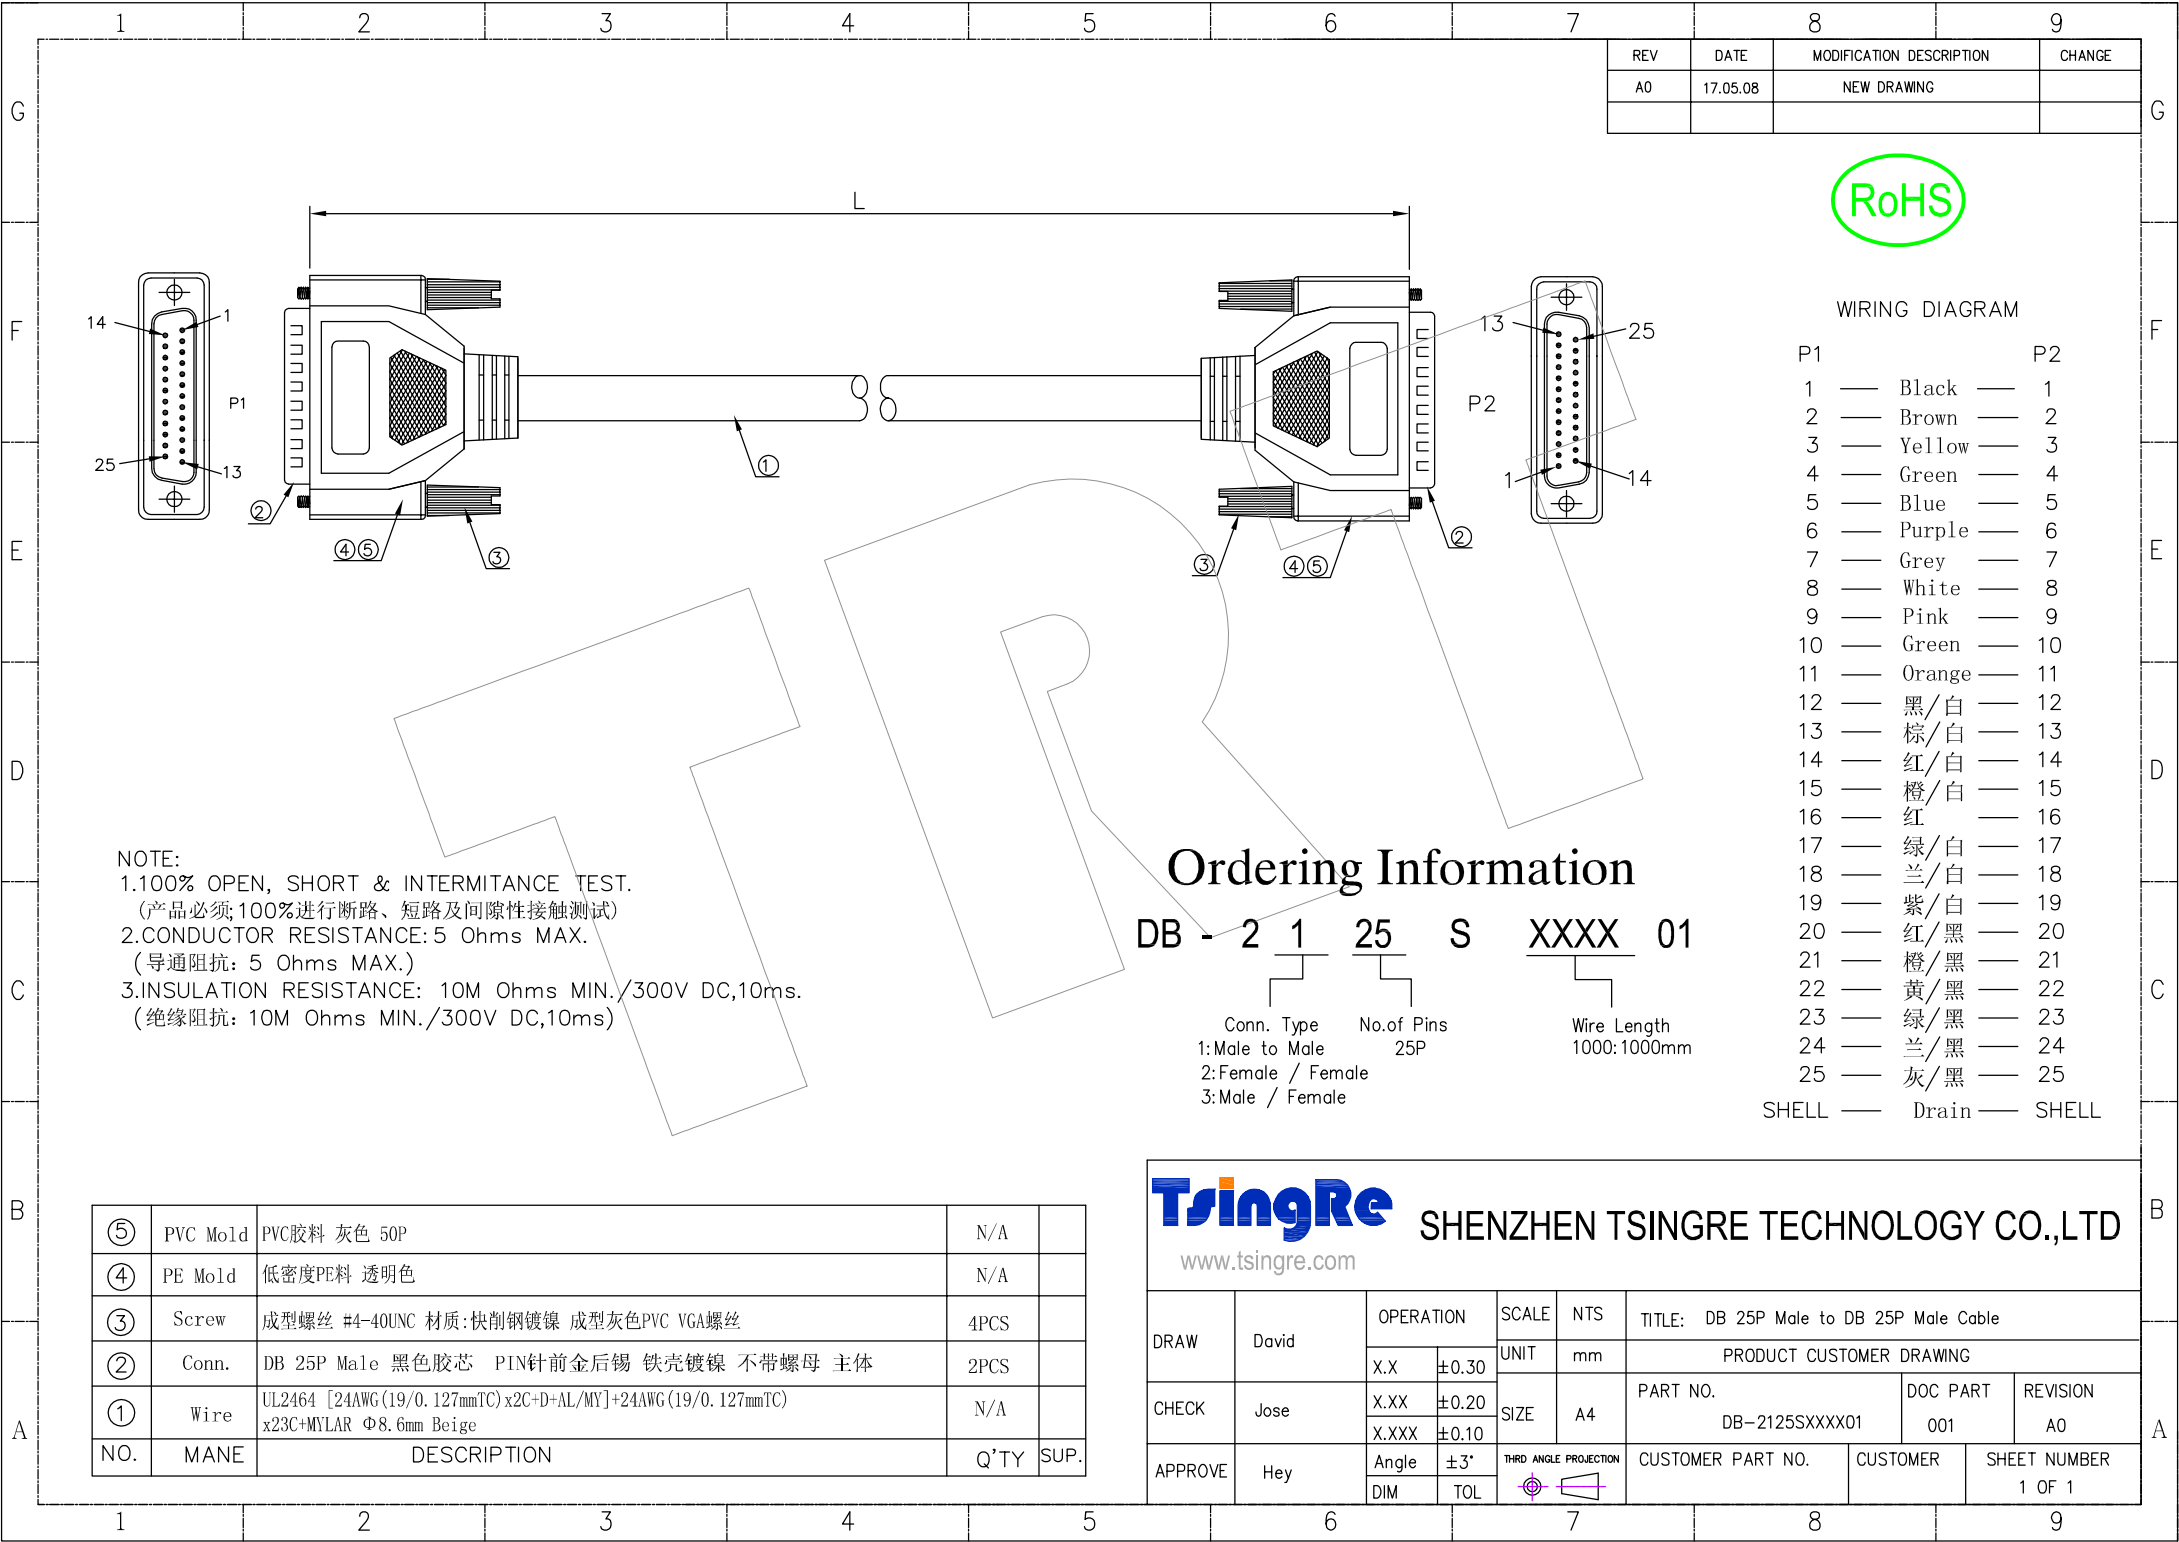

WIRING DIAGRAM

P1		P2
1	Black	1
2	Brown	2
3	Yellow	3
4	Green	4
5	Blue	5
6	Purple	6
7	Grey	7
8	White	8
9	Pink	9
10	Green	10
11	Orange	11
12	黑/白	12
13	棕/白	13
14	红/白	14
15	橙/白	15
16	红	16
17	绿/白	17
18	兰/白	18
19	紫/白	19
20	红/黑	20
21	橙/黑	21
22	黄/黑	22
23	绿/黑	23
24	兰/黑	24
25	灰/黑	25
SHELL	Drain	SHELL

NOTE:
1.100% OPEN, SHORT & INTERMITANCE TEST.
(产品必须;100%进行断路、短路及间隙性接触测试)
2.CONDUCTOR RESISTANCE: 5 Ohms MAX.
(导通阻抗: 5 Ohms MAX.)
3.INSULATION RESISTANCE: 10M Ohms MIN./300V DC,10ms.
(绝缘阻抗: 10M Ohms MIN./300V DC,10ms)

Ordering Information

DB	-	2	1	25	S	XXXX	01
		Conn. Type		No.of Pins		Wire Length	
		1: Male to Male		25P		1000:1000mm	
		2: Female / Female					
		3: Male / Female					

⑤	PVC Mold	PVC胶料 灰色 50P	N/A	
④	PE Mold	低密度PE料 透明色	N/A	
③	Screw	成型螺丝 #4-40UNC 材质:快削钢镀镍 成型灰色PVC VGA螺丝	4PCS	
②	Conn.	DB 25P Male 黑色胶芯 PIN针前金后锡 铁壳镀镍 不带螺母 主体	2PCS	
①	Wire	UL2464 [24AWG (19/0. 127mmTC) x2C+D+AL/MY]+24AWG (19/0. 127mmTC) x23C+MYLAR Φ8.6mm Beige	N/A	
NO.	MANE	DESCRIPTION	Q'TY	SUP.



SHENZHEN TSINGRE TECHNOLOGY CO.,LTD

DRAW	David	OPERATION		SCALE	NTS	TITLE: DB 25P Male to DB 25P Male Cable				
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING				
CHECK	Jose	X.XX	±0.20	SIZE	A4	PART NO.		DOC PART	REVISION	
		X.XXX	±0.10			DB-2125SXXXX01		001	A0	
APPROVE	Hey	Angle	±3°	THRD ANGLE PROJECTION 		CUSTOMER PART NO.		CUSTOMER	SHEET NUMBER	
		DIM	TOL						1 OF 1	