




REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	17.05.08	NEW DRAWING	

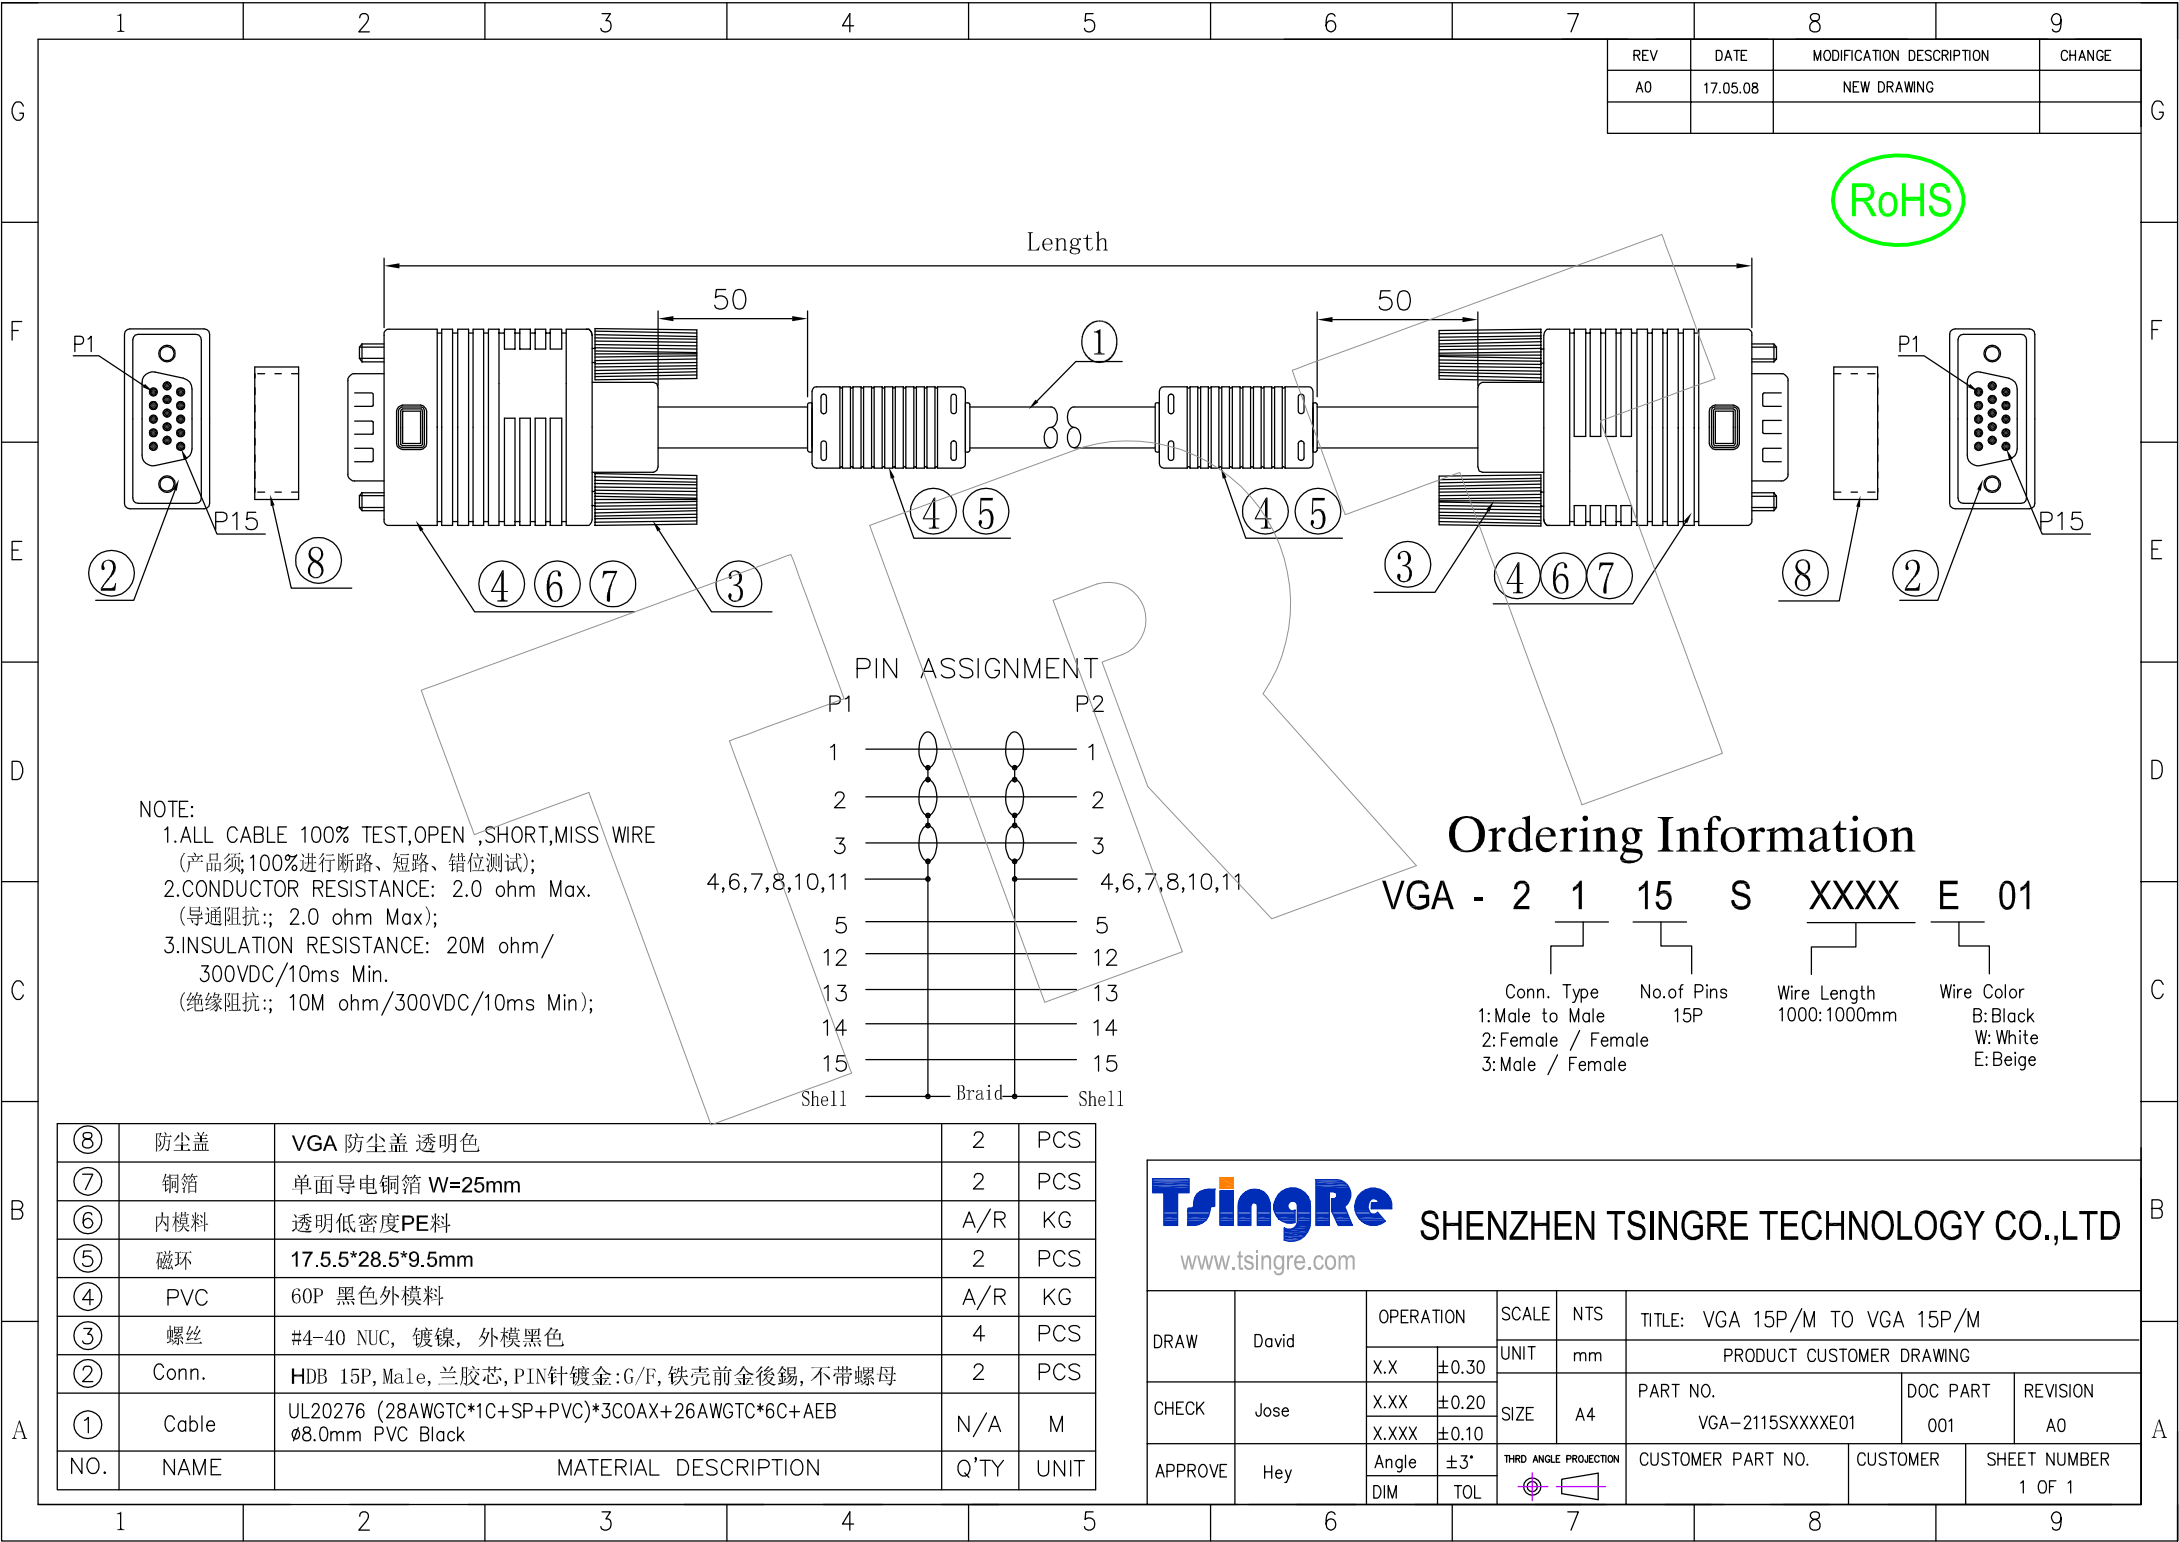

NOTE:
1.ALL CABLE 100% TEST,OPEN ,SHORT,MISS WIRE
(产品须;100%进行断路、短路、错位测试);
2.CONDUCTOR RESISTANCE: 2.0 ohm Max.
(导通阻抗;; 2.0 ohm Max);
3.INSULATION RESISTANCE: 20M ohm/
300VDC/10ms Min.
(绝缘阻抗;; 10M ohm/300VDC/10ms Min);

PIN ASSIGNMENT			
P1		P2	
1	—	1	—
2	—	2	—
3	—	3	—
4,6,7,8,10,11	—	4,6,7,8,10,11	—
5	—	5	—
12	—	12	—
13	—	13	—
14	—	14	—
15	—	15	—
Shell	—	Shell	—

Ordering Information

VGA - 2 1 15 S XXXX E 01

Conn. Type No.of Pins Wire Length Wire Color
1: Male to Male 15P 1000:1000mm B: Black
2: Female / Female W: White
3: Male / Female E: Beige

⑧	防尘盖	VGA 防尘盖 透明色	2	PCS
⑦	铜箔	单面导电铜箔 W=25mm	2	PCS
⑥	内模料	透明低密度PE料	A/R	KG
⑤	磁环	17.5.5*28.5*9.5mm	2	PCS
④	PVC	60P 黑色外模料	A/R	KG
③	螺丝	#4-40 NUC, 镀镍, 外模黑色	4	PCS
②	Conn.	HDB 15P, Male, 兰胶芯, PIN针镀金:G/F, 铁壳前金後錫, 不帶螺母	2	PCS
①	Cable	UL20276 (28AWGTC*1C+SP+PVC)*3COAX+26AWGTC*6C+AEB Ø8.0mm PVC Black	N/A	M
NO.	NAME	MATERIAL DESCRIPTION	Q'TY	UNIT

SHENZHEN TSINGRE TECHNOLOGY CO.,LTD

www.tsingre.com

DRAW	David	OPERATION		SCALE	NTS	TITLE: VGA 15P/M TO VGA 15P/M		
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING		
CHECK	Jose	X.XX	±0.20	SIZE	A4	PART NO.	DOC PART	REVISION
		X.XXX	±0.10			VGA-2115SXXXXE01	001	A0
APPROVE	Hey	Angle	±3°	THRD ANGLE PROJECTION		CUSTOMER PART NO.	CUSTOMER	SHEET NUMBER
		DIM	TOL					1 OF 1